



**Technical and Test Institute  
for Construction Prague**

Prosecká 811/76a  
190 00 Prague  
Czech Republic  
eota@tzus.cz



Member of



www.eota.eu

## European Technical Assessment

**ETA 14/0138  
of 22/09/2021**

**Technical Assessment Body issuing the ETA:** Technical and Test Institute  
for Construction Prague

**Trade name of the construction product**

MO-H,  
MO-HW,  
MO-HS  
steel bonded anchor

**Product family to which the construction  
product belongs**

Product area code: 33  
Bonded injection type anchor for use in  
cracked and uncracked concrete  
for a working life of 50 and/or 100 years

**Manufacturer**

Index Técnicas Expansivas, S.L.  
P.I. La Portalada II C. Segador 13  
26006 Logroño  
Spain

**Manufacturing plant**

Index Plant 1

**This European Technical Assessment  
contains**

18 pages including 14 Annexes which form  
an integral part of this assessment.

**This European Technical Assessment is  
issued in accordance with regulation  
(EU) No 305/2011, on the basis of**

EAD 330499-01-0601  
Bonded fasteners for use in concrete

**This version replaces**

ETA 14/0138 issued on 20/05/2018

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body - Technical and Test Institute for Construction Prague. Any partial reproduction has to be identified as such.

## 1. Technical description of the product

The MO-H, MO-HW (faster curing time) and MO-HS (extended processing time) with steel elements is bonded anchor (injection type).

Steel elements can be galvanized or stainless steel threaded rod or rebar.

Steel element is placed into a drilled hole filled with injection mortar. The steel element is anchored via the bond between metal part, injection mortar and concrete.

The illustration and the description of the product are given in Annex A.

## 2. Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed working life of the anchor of 50 years and/or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the products in relation to the expected economically reasonable working life of the works.

## 3. Performance of the product and references to the methods used for its assessment

### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1, C 2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 3, C 4
Displacements under short-term and long-term loading	See Annex C 5
Characteristic resistance for seismic performance categories C1	See Annex C 6

### 3.2 Hygiene, health and environment (BWR 3)

No performance determined.

### 3.3 General aspects relating to fitness for use

Durability and serviceability are only ensured if the specifications of intended use according to Annex B 1 are kept.

## 4. Assessment and verification of constancy of performance (AVCP) system applied with reference to its legal base

According to the Decision 96/582/EC of the European Commission<sup>1</sup> the system of assessment verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table apply.

Product	Intended use	Level or class	System
Metal anchors for use in concrete	For fixing and/or supporting to concrete, structural elements (which contributes to the stability of the works) or heavy units	-	1

<sup>1</sup> Official Journal of the European Communities L 254 of 08.10.1996

**5. Technical details necessary for the implementation of the AVCP system, as provided in the applicable EAD**

The factory production control shall be in accordance with the control plan which is a part of the technical documentation of this European Technical Assessment. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited at Technical and Test Institute for Construction Prague.<sup>2</sup> The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

Issued in Prague on 22.09.2021

By

**Ing. Mária Schaan**


Head of the Technical Assessment Body




---

<sup>2</sup> The control plan is a confidential part of the documentation of the European Technical Assessment, but not published together with the ETA and only handed over to the approved body involved in the procedure of AVCP.

**Threaded rod**

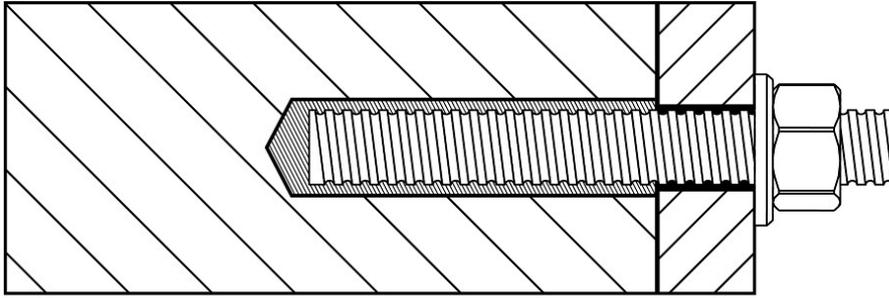

**Reinforcing bar**

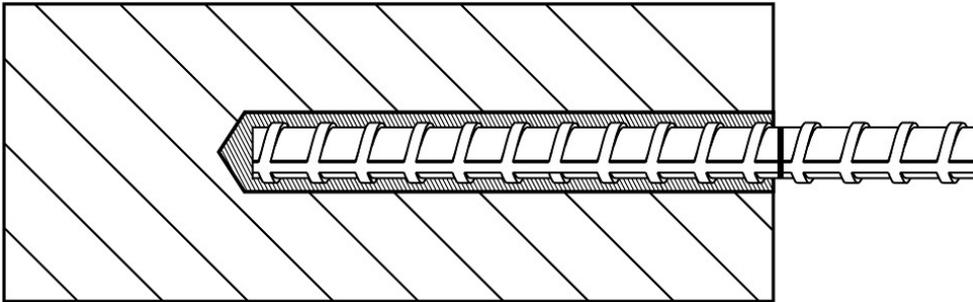

**MO-H, MO-HW, MO-HS**

**Product description**  
Installed conditions

**Annex A 1**

**Coaxial cartridge (CC)**

MO-H, MO-HW, MO-HS


150 ml  
380 ml  
400 ml  
410 ml



**Side by side cartridge (SBS)**

MO-H, MO-HW, MO-HS

350 ml  
825 ml

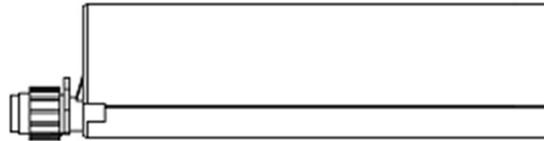

**Two part foil in a single piston component cartridge (FCC)**

MO-H, MO-HW, MO-HS

150 ml  
170 ml  
300 ml  
550 ml  
850 ml



**Peeler cartridge (PLR)**

MO-H, MO-HW, MO-HS

280 ml



**Marking of the mortar cartridges**


Identifying mark of the producer, Trade name, Charge code number, Storage life, Curing and processing time

**Mixing nozzle**


KW



RC



RM

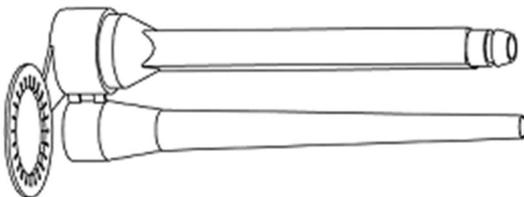

TB



KR for use with 850




**MO-H, MO-HW, MO-HS**

**Product description**  
Injection system

**Annex A 2**

### Threaded rod M8, M10, M12, M16, M20, M24, M27, M30

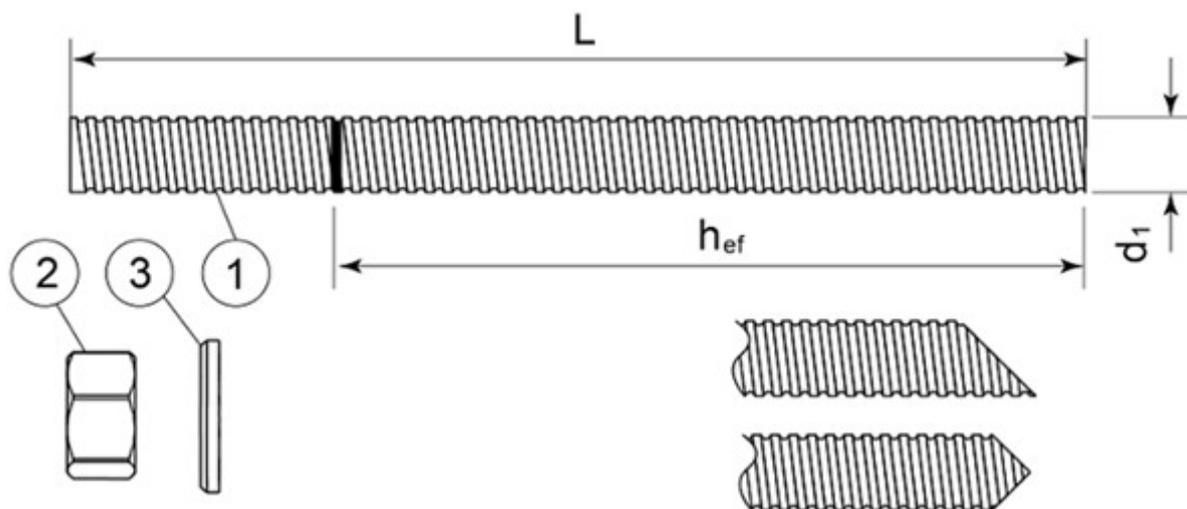

Standard commercial threaded rod with marked embedment depth

Part	Designation	Material
<b>Steel, zinc plated <math>\geq 5 \mu\text{m}</math> acc. to EN ISO 4042 or Steel, Hot-dip galvanized <math>\geq 40 \mu\text{m}</math> acc. to EN ISO 1461 and EN ISO 10684 or Steel, zinc diffusion coating <math>\geq 15 \mu\text{m}</math> acc. to EN 13811</b>		
1	Anchor rod	Steel, EN 10087 or EN 10263 Property class 4.6, 5.8, 8.8, 10.9* EN ISO 898-1
2	Hexagon nut EN ISO 4032	According to threaded rod, EN 20898-2
3	Washer EN ISO 887, EN ISO 7089, EN ISO 7093 or EN ISO 7094	According to threaded rod
<b>Stainless steel</b>		
1	Anchor rod	Material: A2-70, A4-70, A4-80, EN ISO 3506
2	Hexagon nut EN ISO 4032	According to threaded rod
3	Washer EN ISO 887, EN ISO 7089, EN ISO 7093 or EN ISO 7094	According to threaded rod
<b>High corrosion resistant steel</b>		
1	Anchor rod	Material: 1.4529, 1.4565, EN 10088-1
2	Hexagon nut EN ISO 4032	According to threaded rod
3	Washer EN ISO 887, EN ISO 7089, EN ISO 7093 or EN ISO 7094	According to threaded rod

\*Galvanized rod of high strength are sensitive to hydrogen induced brittle failure

**MO-H, MO-HW, MO-HS**

**Product description**  
Threaded rod and materials

**Annex A 3**

**Rebar Ø8, Ø10, Ø12, Ø16, Ø20, Ø25, Ø32**



Standard commercial reinforcing bar with marked embedment depth

<b>Product form</b>		<b>Bars and de-coiled rods</b>	
Class		B	C
Characteristic yield strength $f_{yk}$ or $f_{0,2k}$ (MPa)		400 to 600	
Minimum value of $k = (f_t/f_y)_k$		$\geq 1,08$	$\geq 1,15$ < 1,35
Characteristic strain at maximum force $\epsilon_{uk}$ (%)		$\geq 5,0$	$\geq 7,5$
Bendability		Bend/Rebend test	
Maximum deviation from nominal mass (individual bar) (%)	Nominal bar size (mm)	$\pm 6,0$ $\pm 4,5$	
	$\leq 8$ > 8		
Bond: Minimum relative rib area, $f_{R,min}$	Nominal bar size (mm)	0,040 0,056	
	8 to 12 > 12		

**MO-H, MO-HW, MO-HS**

**Product description**  
Rebars and materials

**Annex A 4**

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static load.
- Seismic actions category C1 (max w = 0,5 mm): threaded rod size M10, M12, M16, M20, M24

### Base materials

- Uncracked concrete.
- Cracked and uncracked concrete for threaded rod size M10, M12, M16, M20, M24
- Reinforced or unreinforced normal weight concrete of strength class C20/25 at minimum and C50/60 at maximum according EN 206-1:2000-12.

### Temperature range:

- -40°C to +80°C (max. short. term temperature +80°C and max. long term temperature +50°C)

### Use conditions (Environmental conditions)

- (X1) Structures subject to dry internal conditions (zinc coated steel, stainless steel, high corrosion resistance steel).
- (X2) Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel A4, high corrosion resistant steel).
- (X3) Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Concrete conditions:

- I1 – installation in dry or wet (water saturated) concrete and use in service in dry or wet concrete.
- I2 – installation in water-filled (not sea water) and use in service in dry or wet concrete

### Design:

- The anchorages are designed in accordance with the EN 1992-4 under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings.
- Anchorages under seismic actions (cracked concrete) have to be designed in accordance with EN 1992-4.

### Installation:

- Hole drilling by hammer drill mode.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

### Installation direction:


- D3 – downward and horizontal and upwards (e.g. overhead) installation

**MO-H, MO-HW, MO-HS**

**Intended use**  
Specifications


**Annex B 1**

**Applicator gun**

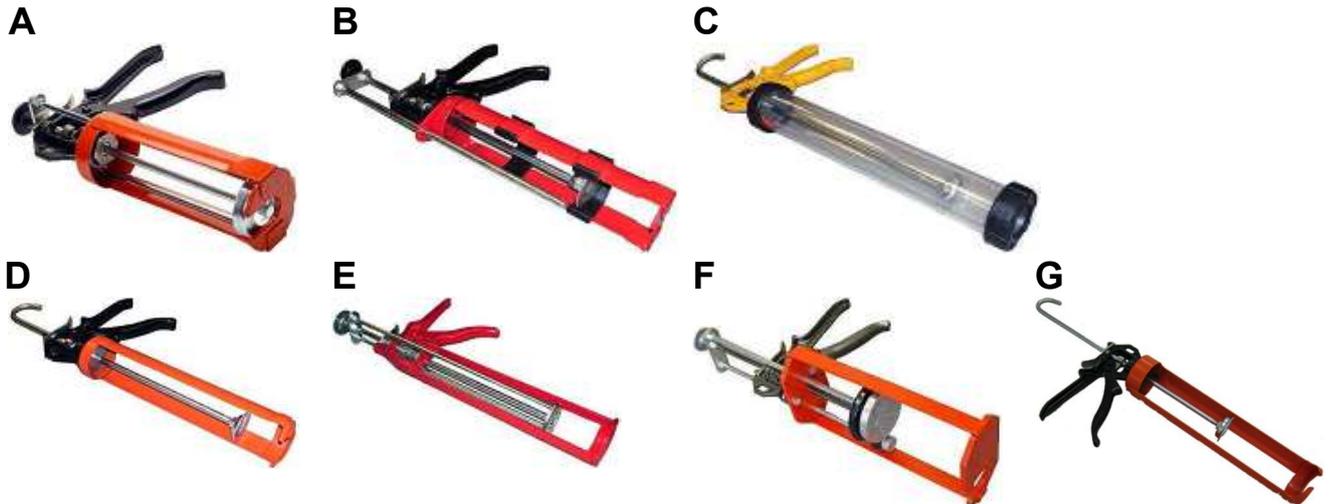

Applicator gun	A	B	C	D	E	F	G
Cartridge	Coaxial 380ml 400ml 410ml	Side by side 350ml	Foil capsule 150ml 300ml 550ml	Foil capsule 150ml 300ml Peeler 280ml	Coaxial 150ml	Side by side 825ml	Foil capsule 850ml

**Cleaning brush**

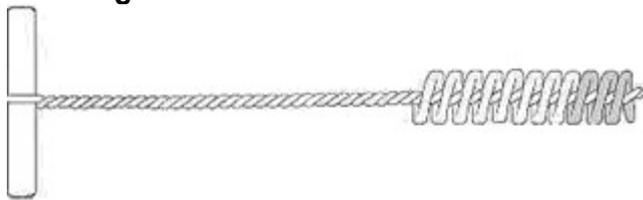

**MO-H, MO-HW, MO-HS**

**Intended use**  
Applicator guns  
Cleaning brush

**Annex B 2**

## Installation instructions

1. Drill the hole to the correct diameter and depth using a rotary percussion drilling machine.
2. Thoroughly clean the hole in the following sequence using the brush with the required extensions and a blow pump:

**Blow Clean x2.**

**Brush Clean x2.**


**Blow Clean x2.**

**Brush Clean x2.**

**Blow Clean x2.**

*Remove standing water from the hole prior to cleaning to achieve maximum performance.*

3. Select the appropriate static mixer nozzle for the installation, open the cartridge/cut foil pack and screw nozzle onto the mouth of the cartridge. Insert the cartridge into a good quality applicator (gun).
4. Extrude the first part of the cartridge to waste until an even colour has been achieved without streaking in the resin.
5. If necessary, cut the extension tube to the depth of the hole and push onto the end of the mixer nozzle, and fit the correct resin stopper to the other end.
6. Insert the mixer nozzle (or the extension tube with resin stopper when necessary) to the bottom of the hole. Begin to extrude the resin and slowly withdraw the mixer nozzle from the hole ensuring that there are no air voids as the mixer nozzle is withdrawn. Fill the hole to approximately  $\frac{1}{2}$  to  $\frac{3}{4}$  full and withdraw the nozzle completely.
7. Insert the clean threaded bar, free from oil or other release agents, to the bottom of the hole using a back and forth twisting motion ensuring all the threads are thoroughly coated. Adjust to the correct position within the stated working time.
8. Excess resin will be expelled from the hole evenly around the steel element showing that the hole is full.  
This excess resin should be removed from around the mouth of the hole before it sets.
9. Leave the anchor to cure.  
Do not disturb the anchor until the appropriate loading time has elapsed depending on the substrate conditions and ambient temperature.
10. Attach the fixture and tighten the nut to the recommended torque.  
**Do not overtighten.**

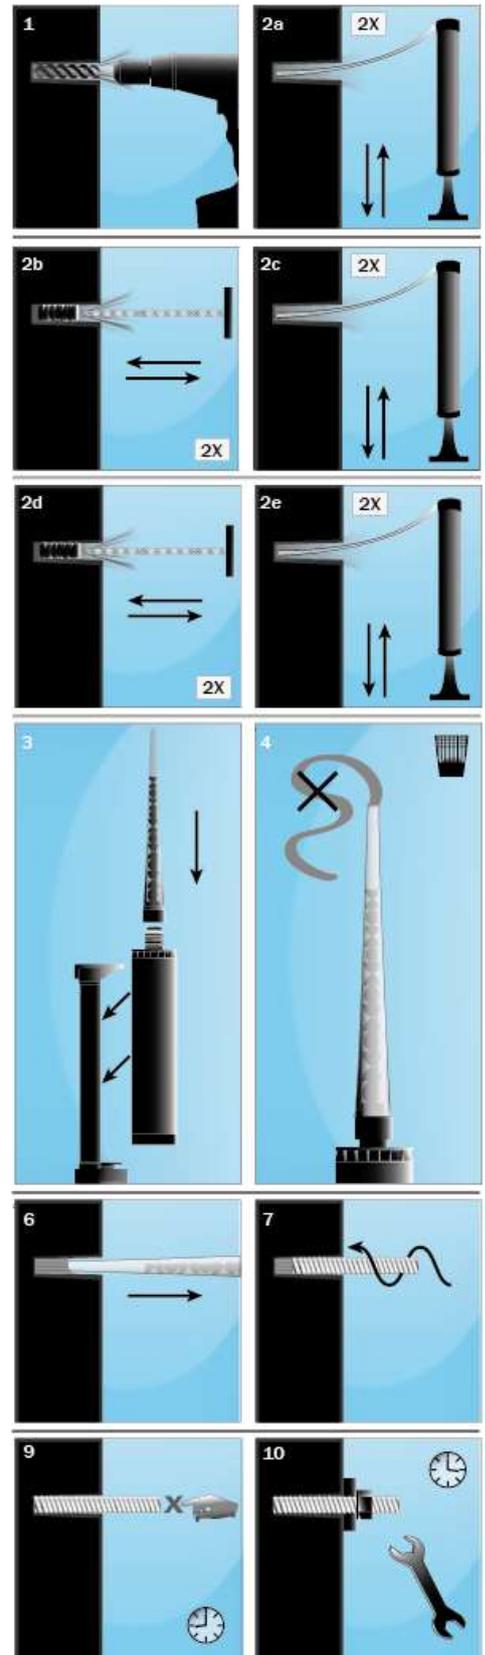

**MO-H, MO-HW, MO-HS**

**Intended use**  
Installation procedure

**Annex B 3**

**Table B1:** Installation parameters of threaded rod

Size		M8	M10	M12	M16	M20	M24	M27	M30
Nominal drill hole diameter	$\varnothing d_0$ [mm]	10	12	14	18	22	26	30	35
Diameter of cleaning brush	$d_b$ [mm]	14	14	20	20	29	29	40	40
Torque moment	$\max T_{fix}$ [Nm]	10	20	40	80	150	200	240	275
Depth of drill hole for $h_{ef,min}$	$h_0 = h_{ef}$ [mm]	64	80	96	128	160	192	216	240
Depth of drill hole for $h_{ef,max}$	$h_0 = h_{ef}$ [mm]	160	200	240	320	400	480	540	600
Minimum edge distance	$c_{min}$ [mm]	35	40	50	65	80	96	110	120
Minimum spacing	$s_{min}$ [mm]	35	40	50	65	80	96	110	120
Minimum thickness of member	$h_{min}$ [mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$				$h_{ef} + 2d_0$			

**Table B2:** Installation parameters of rebar

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32	
Nominal drill hole diameter	$\varnothing d_0$ [mm]	12	14	16	20	25	32	40	
Diameter of cleaning brush	$d_b$ [mm]	14	14	19	22	29	40	42	
Depth of drill hole for $h_{ef,min}$	$h_0 = h_{ef}$ [mm]	64	80	96	128	160	200	256	
Depth of drill hole for $h_{ef,max}$	$h_0 = h_{ef}$ [mm]	160	200	240	320	400	500	640	
Minimum edge distance	$c_{min}$ [mm]	35	40	50	65	80	100	130	
Minimum spacing	$s_{min}$ [mm]	35	40	50	65	80	100	130	
Minimum thickness of member	$h_{min}$ [mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$				$h_{ef} + 2d_0$			

**Table B3:** Minimum curing time

MO-H		
Application temperature	Processing time	Load time
+5 to +10°C	10 mins	145 mins
+10 to +15°C	8 mins	85 mins
+15 to +20°C	6 mins	75 mins
+20 to +25°C	5 mins	50 mins
+25 to +30°C	4 mins	40 mins

Processing time refers to the highest temperature in the range.

Load time refers to the lowest temperature in the range.

Cartridge must be conditioned to a minimum +5°C.

MO-HW		
Application temperature	Processing time	Load time
0 to +5°C	10 mins	75 mins
+5 to +20°C	5 mins	50 mins
+20°C	100 second	20 mins

Processing time refers to the highest temperature in the range.

Load time refers to the lowest temperature in the range.

Cartridge must be conditioned to a minimum 0°C.

MO-HS		
Application temperature	Processing time	Load time
+15 to +20°C	15 mins	5 hours
+20 to +25°C	10 mins	145 mins
+25 to +30°C	7.5 mins	85 mins
+30 to +35°C	5 mins	50 mins
+35 to +40°C	3.5 mins	40 mins

Processing time refers to the highest temperature in the range.

Load time refers to the lowest temperature in the range.

Cartridge must be conditioned to a minimum +15°C.

**MO-H, MO-HW, MO-HS**

**Intended use**  
Installation parameters  
Curing time

**Annex B 4**

**Table C1: Design method EN 1992-4**  
Characteristic values of resistance to tension load of threaded rod

<b>Steel failure – Characteristic resistance</b>										
Size			M8	M10	M12	M16	M20	M24	M27	M30
Steel grade 4.6	$N_{Rk,s}$	[kN]	15	23	34	63	98	141	184	224
Partial safety factor	$\gamma_{Ms}$	[-]	2,00							
Steel grade 5.8	$N_{Rk,s}$	[kN]	18	29	42	79	123	177	230	281
Partial safety factor	$\gamma_{Ms}$	[-]	1,50							
Steel grade 8.8	$N_{Rk,s}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	$\gamma_{Ms}$	[-]	1,50							
Steel grade 10.9	$N_{Rk,s}$	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	$\gamma_{Ms}$	[-]	1,33							
Stainless steel grade A2-70, A4-70	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	$\gamma_{Ms}$	[-]	1,87							
Stainless steel grade A4-80	$N_{Rk,s}$	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	$\gamma_{Ms}$	[-]	1,60							
Stainless steel grade 1.4529	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	$\gamma_{Ms}$	[-]	1,50							
Stainless steel grade 1.4565	$N_{Rk,s}$	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	$\gamma_{Ms}$	[-]	1,87							

<b>Combined pullout and concrete cone failure in concrete C20/25</b>											
Size			M8	M10	M12	M16	M20	M24	M27	M30	
<b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b>											
Dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	10,0	9,5	9,5	9,0	8,5	8,0	6,5	5,5	
Installation safety factor	$\gamma_{inst}$	[-]	1,2								1,4
Flooded hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	8,5	7,5	7,0	7,0	6,5	5,5			
Installation safety factor	$\gamma_{inst}$	[-]	1,4								
Factor for uncracked concrete 50/60	$\psi_c$	[-]	1								
Size			M10	M12	M16	M20	M24				
<b>Characteristic bond resistance in cracked concrete for a working life of 50 years</b>											
Dry and wet concrete	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,5	4,5	4,5	4,0	4,0				
Installation safety factor	$\gamma_{inst}$	[-]	1,2								
Flooded hole	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	4,5	4,5	4,5	4,0	4,0				
Installation safety factor	$\gamma_{inst}$	[-]	1,4								
<b>Characteristic bond resistance in cracked concrete for a working life of 100 years</b>											
Dry and wet concrete	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	3,0	3,0	3,0	2,5	2,5				
Installation safety factor	$\gamma_{inst}$	[-]	1,2								
Flooded hole	$\tau_{Rk,cr}$	[N/mm <sup>2</sup> ]	3,0	3,0	3,0	2,5	2,5				
Installation safety factor	$\gamma_{inst}$	[-]	1,4								
Factor for influence of sustained load for a working life 50 years	T1: 24°C / 40°C T2: 50°C / 80°C	$\psi_{sus}^0$	[-]				0,75				
Factor for cracked concrete	C30/37	$\psi_c$	[-]				1,12				
	C40/50		[-]				1,23				
	C50/60		[-]				1,30				

<b>Concrete cone failure</b>										
Factor for concrete cone failure for uncracked concrete	$k_{ucr,N}$	[-]								11
Factor for concrete cone failure for cracked concrete	$k_{cr,N}$									7,7
Edge distance	$c_{cr,N}$	[mm]								1,5h <sub>ef</sub>

<b>Splitting failure</b>											
Size			M8	M10	M12	M16	M20	M24	M27	M30	
Edge distance	$c_{cr,sp}$	[mm]								1,5h <sub>ef</sub>	
Spacing	$s_{cr,sp}$	[mm]								3,0h <sub>ef</sub>	

**MO-H, MO-HW, MO-HS**

**Performances**

Design according to EN 1992-4  
Characteristic resistance for tension loads - threaded rod

**Annex C 1**

**Table C2:** Design method EN 1992-4  
Characteristic values of resistance to tension load of rebar

<b>Steel failure – Characteristic resistance</b>									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Rebar BSt 500 S	$N_{Rk,s}$	[kN]	28	43	62	111	173	270	442
Partial safety factor	$\gamma_{Ms}$	[-]	1,4						

<b>Combined pullout and concrete cone failure in uncracked concrete C20/25</b>										
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32	
<b>Characteristic bond resistance in uncracked concrete for a working life of 50 years and 100 years</b>										
<b>Dry and wet concrete</b>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11,0	9,5	9,5	9,0	8,5	8,5	5,5	
Installation safety factor	$\gamma_{inst}$	[-]	1,2							
<b>Flooded hole</b>	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11,0	9,5	9,5	9,0	8,5	8,5	5,5	
Installation safety factor	$\gamma_{inst}$	[-]	1,4							
Factor for influence of sustained load for a working life 50 years	$\psi^0_{sus}$	[-]				0,75				
						0,73				
Factor for concrete C50/60	$\psi_c$	[-]	1							

<b>Concrete cone failure</b>									
Factor for concrete cone failure	$k_{ucr,N}$	[-]	11						
Edge distance	$c_{cr,N}$	[mm]	1,5h <sub>ef</sub>						

<b>Splitting failure</b>									
Size			Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Edge distance	$c_{cr,sp}$	[mm]	1,5h <sub>ef</sub>						
Spacing	$s_{cr,sp}$	[mm]	3,0h <sub>ef</sub>						

**MO-H, MO-HW, MO-HS**

**Performances**

Design according to EN 1992-4  
Characteristic resistance for tension loads - rebar

**Annex C 2**

**Table C3:** Design method EN 1992-4  
Characteristic values of resistance to shear load of threaded rod

<b>Steel failure without lever arm</b>									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade <b>4.6</b>	$V_{Rk,s}$ [kN]	7	12	17	31	49	71	92	112
Partial safety factor	$\gamma_{Ms}$ [-]	1,67							
Steel grade <b>5.8</b>	$V_{Rk,s}$ [kN]	9	15	21	39	61	88	115	140
Partial safety factor	$\gamma_{Ms}$ [-]	1,25							
Steel grade <b>8.8</b>	$V_{Rk,s}$ [kN]	15	23	34	63	98	141	184	224
Partial safety factor	$\gamma_{Ms}$ [-]	1,25							
Steel grade <b>10.9</b>	$V_{Rk,s}$ [kN]	18	29	42	79	123	177	230	281
Partial safety factor	$\gamma_{Ms}$ [-]	1,5							
Stainless steel grade <b>A2-70, A4-70</b>	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	$\gamma_{Ms}$ [-]	1,56							
Stainless steel grade <b>A4-80</b>	$V_{Rk,s}$ [kN]	15	23	34	63	98	141	184	224
Partial safety factor	$\gamma_{Ms}$ [-]	1,33							
Stainless steel grade <b>1.4529</b>	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	$\gamma_{Ms}$ [-]	1,25							
Stainless steel grade <b>1.4565</b>	$V_{Rk,s}$ [kN]	13	20	30	55	86	124	161	196
Partial safety factor	$\gamma_{Ms}$ [-]	1,56							
Characteristic resistance of group of fasteners									
Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$									

<b>Steel failure with lever arm</b>									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Steel grade <b>4.6</b>	$M^o_{Rk,s}$ [N.m]	15	30	52	133	260	449	666	900
Partial safety factor	$\gamma_{Ms}$ [-]	1,67							
Steel grade <b>5.8</b>	$M^o_{Rk,s}$ [N.m]	19	37	66	166	325	561	832	1125
Partial safety factor	$\gamma_{Ms}$ [-]	1,25							
Steel grade <b>8.8</b>	$M^o_{Rk,s}$ [N.m]	30	60	105	266	519	898	1332	1799
Partial safety factor	$\gamma_{Ms}$ [-]	1,25							
Steel grade <b>10.9</b>	$M^o_{Rk,s}$ [N.m]	37	75	131	333	649	1123	1664	2249
Partial safety factor	$\gamma_{Ms}$ [-]	1,50							
Stainless steel grade <b>A2-70, A4-70</b>	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	$\gamma_{Ms}$ [-]	1,56							
Stainless steel grade <b>A4-80</b>	$M^o_{Rk,s}$ [N.m]	30	60	105	266	519	898	1332	1799
Partial safety factor	$\gamma_{Ms}$ [-]	1,33							
Stainless steel grade <b>1.4529</b>	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	$\gamma_{Ms}$ [-]	1,25							
Stainless steel grade <b>1.4565</b>	$M^o_{Rk,s}$ [N.m]	26	52	92	233	454	786	1165	1574
Partial safety factor	$\gamma_{Ms}$ [-]	1,56							
<b>Concrete pry-out failure</b>									
Factor for resistance to pry-out failure	$k_8$ [-]	2							

<b>Concrete edge failure</b>									
Size		M8	M10	M12	M16	M20	M24	M27	M30
Outside diameter of fastener	$d_{nom}$ [mm]	8	10	12	16	20	24	27	30
Effective length of fastener	$l_f$ [mm]	min ( $h_{ef}$ , $8 d_{nom}$ )							

**MO-H, MO-HW, MO-HS**

**Performances**

Design according to EN 1992-4  
Characteristic resistance for shear loads - threaded rod

**Annex C 3**

**Table C4:** Design method EN 1992-4  
Characteristic values of resistance to shear load of rebar

<b>Steel failure without lever arm</b>								
<b>Size</b>		<b>Ø8</b>	<b>Ø10</b>	<b>Ø12</b>	<b>Ø16</b>	<b>Ø20</b>	<b>Ø25</b>	<b>Ø32</b>
Rebar BSt 500 S	$V_{Rk,s}$ [kN]	14	22	31	55	86	135	221
Partial safety factor	$\gamma_{Ms}$ [-]	1,5						
Characteristic resistance of group of fasteners								
Ductility factor $k_7 = 1,0$ for steel with rupture elongation $A_5 > 8\%$								

<b>Steel failure with lever arm</b>								
<b>Size</b>		<b>Ø8</b>	<b>Ø10</b>	<b>Ø12</b>	<b>Ø16</b>	<b>Ø20</b>	<b>Ø25</b>	<b>Ø32</b>
Rebar BSt 500 S	$M^o_{Rk,s}$ [N.m]	33	65	112	265	518	1013	2122
Partial safety factor	$\gamma_{Ms}$ [-]	1,5						
<b>Concrete pry-out failure</b>								
Factor for resistance to pry-out failure	$k_8$ [-]	2						

<b>Concrete edge failure</b>								
<b>Size</b>		<b>Ø8</b>	<b>Ø10</b>	<b>Ø12</b>	<b>Ø16</b>	<b>Ø20</b>	<b>Ø25</b>	<b>Ø32</b>
Outside diameter of fastener	$d_{nom}$ [mm]	8	10	12	16	20	25	32
Effective length of fastener	$l_f$ [mm]	min ( $h_{ef}$ , 8 $d_{nom}$ )						

<b>MO-H, MO-HW, MO-HS</b>	<b>Annex C 4</b>
<b>Performances</b> Design according to EN 1992-4 Characteristic resistance for shear loads - rebar	

**Table C5:** Displacement of threaded rod under tension and shear load

Size		M8	M10	M12	M16	M20	M24	M27	M30
Tension load									
Uncracked concrete									
$\delta_{N0}$	[mm/kN]	0,05	0,04	0,03	0,02	0,02	0,02	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,11	0,09	0,06	0,04	0,03	0,02	0,02	0,02
Cracked concrete									
$\delta_{N0}$	[mm/kN]		0,08	0,09	0,05	0,03	0,02		
$\delta_{N\infty}$	[mm/kN]		0,51	0,32	0,18	0,13	0,11		
Shear load									
$\delta_{V0}$	[mm/kN]	0,48	0,30	0,20	0,11	0,10	0,08	0,06	0,05
$\delta_{V\infty}$	[mm/kN]	0,72	0,45	0,30	0,17	0,14	0,12	0,10	0,08

**Table C6:** Displacement of rebar under tension and shear load

Size		Ø8	Ø10	Ø12	Ø16	Ø20	Ø25	Ø32
Tension load								
Uncracked concrete								
$\delta_{N0}$	[mm/kN]	0,04	0,03	0,02	0,02	0,01	0,01	0,01
$\delta_{N\infty}$	[mm/kN]	0,09	0,07	0,05	0,03	0,02	0,01	0,01
Shear load								
$\delta_{V0}$	[mm/kN]	0,05	0,04	0,03	0,02	0,01	0,01	0,01
$\delta_{V\infty}$	[mm/kN]	0,08	0,06	0,05	0,03	0,02	0,01	0,01

MO-H, MO-HW, MO-HS

Performances  
Displacement

**Annex C 5**

**Table C7: Characteristic values of resistance under seismic action category C1 for threaded rods**

Size			M10	M12	M16	M20	M24
<b>Tension load</b>							
<b>Steel failure</b>							
Characteristic resistance grade <b>4.6</b>	$N_{Rk,s,eq}$	[kN]	23	34	63	98	141
Partial safety factor	$\gamma_{Ms}$	[-]	2,00				
Characteristic resistance grade <b>5.8</b>	$N_{Rk,s,eq}$	[kN]	29	42	79	123	177
Partial safety factor	$\gamma_{Ms}$	[-]	1,50				
Characteristic resistance grade <b>8.8</b>	$N_{Rk,s,eq}$	[kN]	46	67	126	196	282
Partial safety factor	$\gamma_{Ms}$	[-]	1,50				
Characteristic resistance grade <b>10.9</b>	$N_{Rk,s,eq}$	[kN]	58	84	157	245	353
Partial safety factor	$\gamma_{Ms}$	[-]	1,33				
Characteristic resistance <b>A2-70, A4-70</b>	$N_{Rk,s,eq}$	[kN]	41	59	110	172	247
Partial safety factor	$\gamma_{Ms}$	[-]	1,87				
Characteristic resistance <b>A4-80</b>	$N_{Rk,s,eq}$	[kN]	46	67	126	196	282
Partial safety factor	$\gamma_{Ms}$	[-]	1,60				
Characteristic resistance <b>1.4529</b>	$N_{Rk,s,eq}$	[kN]	41	59	110	172	247
Partial safety factor	$\gamma_{Ms}$	[-]	1,50				
Characteristic resistance <b>1.4565</b>	$N_{Rk,s,eq}$	[kN]	41	59	110	172	247
Partial safety factor	$\gamma_{Ms}$	[-]	1,87				
<b>Characteristic resistance to pull-out for a working life of 50 years</b>							
Dry, wet concrete and flooded hole	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	3,5	3,5	3,5	3,5	3,5
<b>Characteristic resistance to pull-out for a working life of 100 years</b>							
Dry, wet concrete and flooded hole	$\tau_{Rk,C1}$	[N/mm <sup>2</sup> ]	3,2	3,2	3,2	2,2	2,2
Installation safety factor – Dry and wet concrete	$\gamma_{inst}$	[-]	1,2				
Installation safety factor – Flooded hole	$\gamma_{inst}$	[-]	1,4				
<b>Shear load</b>							
<b>Steel failure without lever arm</b>							
Characteristic resistance grade <b>4.6</b>	$V_{Rk,s,eq}$	[kN]	7	10	23	30	40
Partial safety factor	$\gamma_{Ms}$	[-]	1,67				
Characteristic resistance grade <b>5.8</b>	$V_{Rk,s,eq}$	[kN]	9	13	28	38	51
Partial safety factor	$\gamma_{Ms}$	[-]	1,25				
Characteristic resistance grade <b>8.8</b>	$V_{Rk,s,eq}$	[kN]	14	21	45	61	81
Partial safety factor	$\gamma_{Ms}$	[-]	1,25				
Characteristic resistance grade <b>10.9</b>	$V_{Rk,s,eq}$	[kN]	18	26	56	76	101
Partial safety factor	$\gamma_{Ms}$	[-]	1,50				
Characteristic resistance <b>A2-70, A4-70</b>	$V_{Rk,s,eq}$	[kN]	12	18	39	53	71
Partial safety factor	$\gamma_{Ms}$	[-]	1,56				
Characteristic resistance <b>A4-80</b>	$V_{Rk,s,eq}$	[kN]	14	21	45	61	81
Partial safety factor	$\gamma_{Ms}$	[-]	1,33				
Characteristic resistance <b>1.4529</b>	$V_{Rk,s,eq}$	[kN]	12	18	39	53	71
Partial safety factor	$\gamma_{Ms}$	[-]	1,25				
Characteristic resistance <b>1.4565</b>	$V_{Rk,s,eq}$	[kN]	12	18	39	53	71
Partial safety factor	$\gamma_{Ms}$	[-]	1,56				
Factor for annular gap	$\alpha_{gap}$	[-]	0,5				

Note: Rebars are not qualified for seismic design

**MO-H, MO-HW, MO-HS**

**Performances**  
Reduction factors for seismic design

**Annex C 6**